




**WACKER
NEUSON**
all it takes!

AR64/3/400

5100004210

[Home](#) >> [Catalog](#) >> [Products](#) >> [Concrete Technology](#) >> [External Vibrators](#) >> [Loosening, Separating, Transporting](#) >> **AR64/3/400**

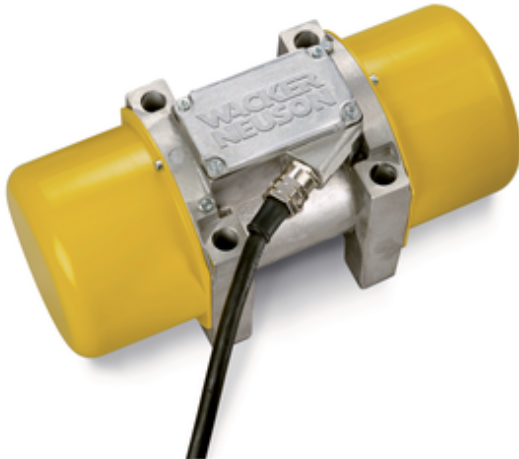

AR64/3/400

Material number 5100004210

External vibrator, Series 6, type of fastening 4, 3000 rpm, 230 V.

Product details

Highlights

- Sturdy design

Comes with

- External vibrator
 - Operator's manual
- (Power cable not included in standard package)

Technical specifications

AR64/3/400

MOTOR	Metric
Motor type	asynchronous motor

MECHANICAL - OUTPUT DETAILS	Metric
Vibrations	3.000 1/min
Centrifugal force	9,270 kN
Vibrations (Hz)	50,0 Hz
Centrifugal force max.	16,050 kN

ELECTRICAL - OUTPUT DETAILS	Metric
Nominal current	1,70 A
Phase	3 ~
Nominal voltage	400 V
Nominal frequency	50 Hz
Nominal power [P]	0,90 kW

ELECTRICAL SYSTEM	Metric
Operating indicator	No
Adjusting frequency	No
Integrated transformer	No
Breaker Switch On/Off	no

MECHANICAL DETAILS	Metric
Hole pattern length	120 mm
Length	352 mm
Height	188 mm
Hole pattern hole diameter	16 mm

Unbalanced mass/side pos2	9
Unbalanced mass/side pos1	18
Width	155 mm
Weight	18,69 kg
Hole pattern width	120 mm

ENVIRONMENT DATA	Metric
Operating temperature range	-10 - 50 °C
Sound level LpA (Standard)	DIN EN ISO 11201
Protection class	I / Protective earthing
Temperature of body surface	80 °C
Storage temperature range	-30 - 70 °C
Sound level LpA	76,0 dB(A)
Degree of protection	IP65

Custom Attributes	Metric
Model serie	AR64

Please Note

This product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the started power may vary due to specific operating conditions. Subject to alterations and errors expected. Applicable also to illustrations.

Copyright © 2024 Wacker Neuson SE